
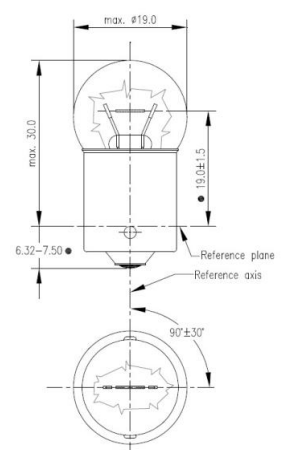


#### GENERAL

	<b>R10W</b> <b>12V 10W BA15s</b>	<b>Features</b>	softglass
	<b>Ordering Number</b> 37311	<b>Standard</b>	ECE R37
<b>Product Description</b>	Incandescent signalling lamp	<b>Typical Applications</b>	rear light

#### TECHNICAL DETAILS

	<b>Rated Voltage</b>	ECE R37: 12V
	<b>Rated Wattage</b>	max. 11W @13,5V
<b>Geometry</b> Light center length: 19mm ± 1,5mm Bulb diameter: max. 19mm	<b>Base</b>	BA15s
	<b>Operating Conditions</b>	burning position: horizontal
	<b>Luminous Flux</b>	125 lm ± 20% @13,5V
	<b>Lifetime</b>	B3: 500h @13,5V Tc: 1000h @13,5V

#### DELIVERY DETAILS

<b>Packaging</b>	Commercial Box Packaging: 200pcs. (20×10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	--	---

valid from 4/12/2017

replace for 14.11.2014-V-PN14/0499

file 37311 - R10W 12V 10W BA15s.100

**Disclaimer:**  
 Subject to change without notice. Errors and omission accepted.  
 Always make sure to use the most recent release.