
vosla
GERMAN PRECISION LIGHTING

Product Information Sheet
HY21W 12V

GENERAL

	HY21W 12V 21W BAW9s	**Features**	original equipment manufacturer quality, amber coating, lead free soldered bottom contact, hardglass, UV-cut
	Ordering Number 38193	**Standard**	ECE R37
Product Description	halogen signalling lamp	**Typical Applications**	indicator

TECHNICAL DETAILS

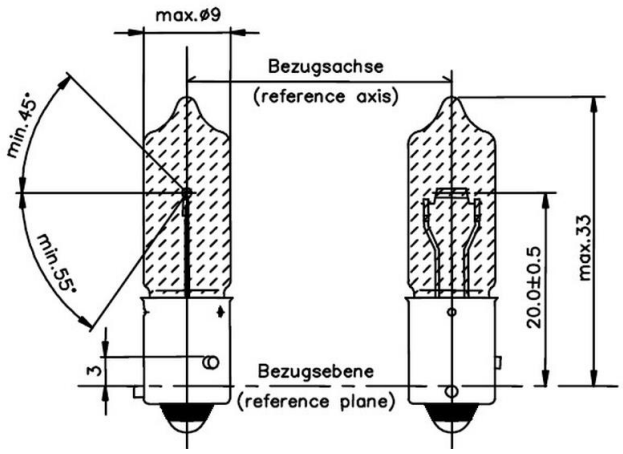

		Rated Voltage	ECE R37: 12V
		Rated Wattage	max. 26,25W @13,5V
		Base	BAW9s
		Operating Conditions	bottom contact temperature max. 200°C
		Luminous Flux	300 lm ± 17% @13,5V
Geometry	Light center length: 20mm ± 0,5mm Bulb diameter: max. 9mm	**Lifetime**	B3: 200h @13,5V Tc: 400h @13,5V

DELIVERY DETAILS

Packaging	Industrial Packaging: 1000pcs. (5×200) Commercial Box Packaging: 200pcs. (20×10)		Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.

valid from 12/04/2017 **replace for** 21.02.2013-V1-PN12/0250 **file** 38193 - HY21W 12V 21W BAW9s.100

Disclaimer:
Subject to change without notice. Errors and omission accepted.
Always make sure to use the most recent release.

vosla GmbH Plauen Germany
www.vosla.com